

# PRV

PATENT- OCH REGISTRERINGSVERKET  
Patentavdelningen



## Intyg Certificate

*Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.*

*This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.*



(71) Sökande                      *Pharmacia & Upjohn AB, Stockholm SE*  
Applicant (s)

(21) Patentansökningsnummer    *9902832-6*  
Patent application number

(86) Ingivningsdatum                      *1999-08-03*  
Date of filing

*Stockholm, 2000-07-14*

*För Patent- och registreringsverket*  
*For the Patent- and Registration Office*

*A. Södervall*  
Anita Södervall

Avgift  
Fee                      *170:-*

## LIQUID DELIVERY CONTAINER

### Technical field

The present invention relates to Pressurisable containers for storing and ejecting liquid, the container comprising a) a front wall having or surrounding a cavity corresponding to the form of an open vessel, b) an opening in the front wall adapted for ejection of the liquid from the container, said opening defining a container axis, c) optionally a sealing over the opening adapted for temporary use, and d) a rear wall closing and sealing the open part of the front wall vessel to confine a space for the liquid in the container, the rear wall running at least partially perpendicular to the container axis and being displaceable or deformable for movement towards the opening to pressurize the container liquid. The invention also relates to methods for container manufacture and devices and methods for ejecting liquid from the containers.

### Background

Liquid containers designed not only to hold and store the liquid but also to deliver or expel the liquid tend to be growingly complex when the control demands on the delivery pattern increases. Whereas the complexity and expense, e.g. in pump systems, can be accepted under certain circumstances, such as in re-usable or multi-dosing devices, these conditions are not always present. It is for example often desirable to provide a single sealed container for each liquid dose to be delivered, e.g. to exactly control the dose and maintain sterility until the use moment in medical delivery applications, and under these unit dose circumstances the price restrictions becomes decisive. The design constraints may become still more severe with added requirements on delivery quality, e.g. in respect of delivery pressure, liquid speed, precise targeting, jet coherence, rapid stream rise and fall, fast delivery, small losses, precise dosing etc. High chamber pressures, e.g. to give high jet speeds or atomizing degrees, may counteract the cost aspect by requiring thick walls of special design or elaborate supports for the chamber or counteract the targeting by rupture, instability or dislocation of the opening. Jet coherence may require a precise opening channel inconsistent with minimum material and manufacturing conditions. High dosing precision requires complete chamber emptying and small losses, in turn requiring rapid pressure build up and fall, placing high demands on cavity stability and controlled collapse of the pressurizing wall. Secondary factors also need consid-

eration. It is for example common to provide a temporary seal over the opening in order to fully seal the container before use and arrangements need to be present for rupture or removal of the seal in connection with delivery. Also, apart from the container properties as such, certain rigidity and additional structures may be needed for retaining the container in a delivery device fixture or seat. In order to avoid handling of individual unit dose containers it is also desirable to provide units of multiple connected containers for sequential firing in a dispenser device, which may require additional structural rigidity and features for feeding and stabilizing the individual containers in a device firing position. Manufacturing demands include both efficient production of the container parts as well as rational filling and sealing of the containers under high purity and even sterile conditions.

Prior art suggestions have met the abovesaid requirements only to a limited extent. The US patent specification 4090642 describes a tape having multiple pockets for a flowable material and represents liquid dispensing with low delivery and control requirements since the flowable material is only to be squeezed out on the tape surface for contact application to the skin. The US 5497763 specification relates to a system including a similar multiple dose tape for atomizing liquid to be inhaled. The delivery requirements are still low as atomization takes place with a separate vibrator and the demands on the tape reduce to liquid outflow through a porous membrane. The GB 2255918 specification similarly relates to droplet formation for inhalation purposes but liquid atomization here takes place by forcing the liquid through narrow container openings. In spite of the higher demands the proposed containers are separate collapsible containers or blister type sheets with multiple containers, requiring heavy support in the dispensing device when the pressure is applied to a dome shaped rear wall, the collapse of which cannot be fully controlled. It should also be noted that for the purposes described no liquid targeting is needed and no liquid stream formation since in connection with inhalation a mist of droplets is passively drawn into the lungs by the patient, even allowing redirection of the stream. The same applies for powder inhalers, as exemplified by WO 90/13328, GB 2242134, DE 19500726, WO 97/04827, US 4811731, US 5207217, US 5415162, EP 469814, EP 129985 and US 4627432, additionally different in that no atomization at all takes place and no discharge from nozzle type openings. Accordingly such demands are not considered and no container design suitable for such purposes is proposed. The WO 96/00050 and EP 224352 specifications do relate to the generation of a stream of droplets, actively shot and

targeted towards an eye and able to traverse an air gap by own inertia. Typically, however, the dispenser arrangements required are elaborate and no suggestions are given for individual unit dose containers with integral delivery nozzles. The WO 96/06581 and 97/23177 specifications suggest such unit dose containers for similar eye treatment purposes. While meritorious in many respects the container designs proposed are similar to those already known and discussed, i.e. either elaborate separate containers or flexible bands with multiple blister type pockets having bulb type walls to be collapsed.

Accordingly there remains a need for improved integrated unit dose sealed container systems suitable both for liquid storage and liquid delivery under high control and quality demands.

#### Summary of invention

A main object of the present invention is to avoid the abovesaid disadvantages of hitherto used container systems. A more specific object is to offer a unit dose sealed container system suitable both for liquid storage and liquid delivery under high control and quality demands. A further object is to provide such a system meeting high demands in respect of liquid speed, precise targeting, jet coherence, rapid stream rise and fall, fast delivery, small losses, precise dosing and/or complete container emptying. Another object is to offer a system allowing high chamber pressures with maintained container integrity and without rupture, instability or dislocation of the opening. Still another object is to offer a system allowing controlled collapse of the pressurizing wall. Yet another object is to offer a system useful for varying degrees of liquid stream momentum, e.g. characterized as low, moderate and high, allowing all from smooth application to penetrating strength. Another object is to offer system containers of low cost in material, component manufacture and filling. Still another object is to offer containers of high rigidity and stability. Yet another object is to provide such container designs suitable for multiple container units useful for sequential delivery of doses. Another object is to provide containers facilitating dispenser device design and requiring limited support at delivery. Another object is to provide a system easy to handle and convenient to operate for the end user.

These objects are reached with the characteristics set forth in the appended patent claims.

By use of a container sealing, collapsible, backing rear wall which before collapse have an overall planar or single-curved shape several precision related objects are reached. For each front wall overall shape the rear wall will have a minimum surface, giving volume and shape stability before collapse and a foreseeable and controlled collapse during pressurization of the container as no buckling, folding or crumpling of the wall is needed as in corresponding flattening or inversion wall deformations. A stretchable material in the wall will allow the wall to increase its surface during collapse, hereby avoiding rupture, permitting dynamic adaptation to any ram or hammer tool surface used for forced displacement of the wall and allowing the wall to conform to the opposite container cavity surface, all serving to give controlled pressure response, including initiation, continuation and fall, and precision in dosing and container emptying. Manufacturing advantages are reached among others in that the wall form facilitates its production, its sealing to the front wall in filling procedures and its joint attachment to several containers in multiple compartment units or packages. Handling, convenience and dispenser device design advantages are reached in that the initial wall shape may be used to give smooth rear wall surfaces and does not build on the boundaries of the material used for the vessel front wall design. Said front wall is relied upon for overall container static and dynamic rigidity. Contrary to blister type containers, the present vessel wall can be designed freely and needs not depend on the curvature of pressed structures for rigidity, can have a wall thickness at each location adapted to its functional object and needs not be locally weakened by stretch operations and can have an integral opening determined by design and not by manufacturing necessities. Wall stability is essential to volume control and the possibilities for consistent emptying. Wall and opening strength is essential to pressure resistance and the operative range of the system, reliable targeting and stable and coherent liquid jets. It also reduces the needs for extensive container support arrangements in the dispenser device and facilitates sequential feeding of containers into a shoot position. If the rigidity advantages are used to avoid bulb wall parts, dispenser container seat and feeding mechanism can be further simplified. Still the option is retained of providing multiple container units and is now not limited to tapes and other flexible structures but can with advantage be formed into self-bearing structures with improved handling and convenience characteristics, similar to that of individual containers. The vessel wall can for example be implemented as the resulting structure when forming the container cavity in an otherwise flat or single-curved plate, al-

lowing both single and multiple container units of high structural rigidity and simple outer form, to the benefit of manufacture, dispenser design and end user handling, allowing free cavity designs e.g. for suitable flow characteristics and device head design as well as allowing opening designs of any length and form with high dynamic stability. Similar advantages are  
 5 obtained if implemented with substantially constant vessel wall thickness or with increasing wall thickness when moving lateral out from the opening location of the wall. The vessel walls with opening in place can be manufactured as an integral, single material, structure e.g. by heat molding in common plastic tools, without need for stretch operations or separate nozzle forming steps, and are easily filled with liquid and sealed by the rear wall.

10 Further objects and advantages of the invention will be evident from the detailed description hereinbelow.

#### Definitions

As used herein the expression "single-curved" shall be understood as any form of a plane or surface obtainable from the same plane in flat form, without stretching or shrinking  
 15 any part thereof in any direction within the plane, i.e. with maintained total surface for both the whole plane and any part thereof. In contrast, a "double-curved" plane or surface can only be obtained from a flat plane if deformed by stretching or shrinking. A curvature shall be regarded "continuous" if the change in curvature is constant or has a smooth variation and shall be regarded as "discontinuous" if there is a sharp change in the plane direction. As physical  
 20 and non-limiting examples a cylinder surface or a corrugated surface are single curved as they can be formed from a non-elastic sheet, e.g. paper sheet, by pure bending whereas the surface of a sphere or saddle cannot be so formed without stretching and accordingly are double-curved. All these surfaces are continuous by having smooth curvature changes whereas for example a sheet with sharp folds are discontinuous at the fold lines.

25 As used herein "system" shall be understood to refer to the invention generally, when including its parts, such as the container and dispenser devices therefore, as well as methods for part operation and use.

In the absence of explicit statements to the contrary, as used herein expressions like "comprising", "including", "having", "with" and similar terminology shall not be understood  
 30 to be exclusively restricted to recited element but shall be understood to allow for the presence of further elements as well and shall be understood to cover any element in integral, subdi-

vided or aggregate forms. Similarly, expressions like "connected", "attached", "arranged", "applied", "between" and similar terminology shall not be understood to cover exclusively direct contact between the recited elements but shall be understood to allow for the presence of one or several intervening elements or structures. The same applies for similar expressions  
5 when used for description of forces and actions.

Also as used herein, positional and directional statements for both the container and the delivery device, such as "axial", "front" and "rear" and "forward" and "rearward", shall be understood with reference to the liquid delivery direction, with respect to which a line centered in the container opening and drawn along the main or average delivery direction shall be  
10 regarded as the system "axis" along which axis the liquid is delivered in the forward direction.

#### Detailed description

The container can be said roughly to include a front wall and a rear wall between which the container space, or enclosure, for the liquid is confined.

The container space is formed mainly between the front wall and the rear wall and in-  
15 cludes a cavity part formed in, or surrounded by, the front wall. Although the space available for the liquid may be larger than the volume of the cavity proper, e.g. additional small volume in the opening and in a rearward protrusion or curvature of the rear wall, it is preferred that the cavity constitutes the major part of the space, especially when the rear wall in the preferred manner is substantially flat or single-curved. The cavity surface preferably has the shape of  
20 the space of a vessel, opening towards the rear wall and having its closed bottom toward the front wall. Among others in order to facilitate complete emptying and form adaptation between cavity and driving ram, it is preferred that the cavity has little, and preferably no, undercut parts when seen from the rear side. This may be accomplished with vessel surface parts being parallel with the cavity axis, e.g. cylindrical parts, but preferably the surface widens all  
25 the way from the axis and laterally outwards, to create a generally concave deepening when seen from the rear wall side. Although the surface may have sharp discontinuities, e.g. between an axial cylindrical surface and a more flat front part, it is preferred e.g. for rigidity reasons that the surface is substantially smooth and continuous. The cavity shape in cross-section planes perpendicular to the axis can have any shape, e.g. oval or polygonal, although  
30 preferably circular. Suitable overall forms are that of a dome or segment of a sphere. As known per se the space may be divided into two or more separate chambers, e.g. for sequen-

tial delivery or for mixing in connection with delivery, for example by use of interior walls running perpendicular or parallel with the axis. Such walls can be manually removable before actual delivery or may be rupturable in connection with delivery. Alternatively adjacent containers may contain different liquids and eject substantially simultaneously, either as two discrete jets or jets mixing in connection with ejection, e.g. by openings arranged offset and close to each other or directed towards each other.

The front wall is preferably more rigid than the rear wall, by comprising more rigid materials and/or material of thicker dimensions. For reasons outlined it is beneficial that the front wall provides the container and its opening with rigidity and stability and preferably the front wall alone is able to provide such rigidity, leaving the rear wall design free for other considerations. As long as these demands are met the front wall can have a variety of configurations. The front wall may have a roughly constant thickness when measured normal to the cavity surface, making the front wall shape about congruent with the cavity surface. It is preferred, however, that the wall thickness measured as stated has a variation and preferably so that the thickness increases when moving away from the axis. This gives the container as a whole a high targeting and pressure sustaining stability while allowing a short and low friction opening design. This in sharp contrast to blister type containers where stretch manufacture of the bulb results in weak lateral wall parts with low overall container stability. A preferred way of arranging for abovesaid variation in wall thickness is to make the front surface of the front wall substantially flat or single-curved, flat being most preferred, giving a lot of manufacturing and handling advantages as indicated. It is further preferred that also the rear surface of the front wall in the neighborhood of the cavity, and disregarding the form of the cavity proper, is single-curved and most preferably flat, giving similar manufacturing and handling advantages. Among others the flat or single-curved surfaces allow attachment thereto of originally flat sheets, films or foils without stretching thereof, e.g. a sealing film on the front surface and the backing rear wall on the rear surface of the front wall. Most preferably the front and rear surfaces are parallel or concentric respectively, giving e.g. overall plate or cylinder type structures, having good rigidity, handling and manufacturing properties.

The opening design can vary depending on the nature of the liquid stream to be produced, e.g. an atomized spray or a concentrated stream to remain coherent or to break up into a linear stream of discrete droplets. Also the stream speed may vary from high penetrating to



low impact surface delivery. Several or multiple openings can be provided, e.g. to produce a controlled shower, although for most applications a single opening is preferred. The opening geometry can be that of a simple tube, diverging, e.g. for assisting in a distributed spray, converging, e.g. for assisting in a coherent stream to be formed, or a combination, such as a venturi type of channel. It is generally preferred to make the duct part of the opening short in order to keep the flow friction low. The desirable front wall thickness at the opening area can still be controlled, e.g. for rigidity purposes, e.g. by cutouts around the opening, preferably on the front surface of the front wall, also assisting in attaching a sealing film over the opening in a manner not interfering with the opening proper. The positioning of the opening with respect to the cavity can be asymmetrical, for example laterally offset towards the cavity side e.g. for mixing of adjacent jets, although normally it is preferred that the opening is symmetrically arranged with respect to the cavity, e.g. concentric with any cavity symmetry.

Although the above considerations apply to individual containers for single and discrete use it is preferred to provide for multiple container units or packages. This can be done by joining several individual container into multiple structures, e.g. by flexible joints to allow structures that can be bent, folded or rolled. Preferably, however, the multiple container package is a substantially rigid and self-bearing structure, among others giving advantages in connection with the delivery device. A rigid structure can be obtained by joining the individual containers by rigid joints but a preferred way is to utilize the rigidity of the front wall as described by providing an enlarged front wall structure and provide several cavities in the structure, among others facilitating manufacture of multiple containers and allowing a smooth and non-complicated exterior. By utilizing the feature of making the front and/or rear surface of the front wall structure flat or single-curved the attachment of films over these surfaces is further simplified, especially if the container surfaces lies in the same plane since an undivided sheet material can then be attached to several, and preferably all, of the individual containers of the structure, e.g. a common foil attached as rear wall to the rear surface of structure or a common peel sheet over the container openings at the front surface.

The overall shape of the front wall structure for multiple containers can take a variety of forms. A single-curved form for example can take the form of a partial or complete cylinder, allowing many containers on a limited volume and giving a very rigid structure. The container openings can be arranged on the cylinder exterior, e.g. if the dispenser device ram is

arranged to hit from inner or concave side of the full or partial cylinder or if openings are provided diametrically opposite each rear wall for ram access therethrough from outside the cylinder. The container openings can be arranged on the cylinder interior, e.g. for simple exterior ram access to the rear wall and also in this case a diametrically opposite hole can be provided for passage of the liquid jet. Essentially flat front wall structures give advantages in manufacture and delivery device design. The shape may for example be rectangular, square or round. The round "disc" shape has been found particularly beneficial, among others in connection with the delivery device where sequential feeding of the containers into a shoot position can be made by simple rotation in a "revolver" type manner, the absence of any particular start position facilitates handling and counting arrangements and allows for self-centering properties.

The layout of the multiple containers on the available structure surface can be made in various ways. The containers can be arranged in a row or line, e.g. to avoid two dimension feeding. Alternatively several rows can be provided along several lines in two dimensions, e.g. parallel or concentric, to allow for a compact container arrangement.

The above design considerations for the front wall mainly apply to the parts occupied by containers, but other structures may be included for secondary purposes, e.g. for gripping, holding, centering or feeding discrete or multiple containers, in manufacture, in the delivery device and by the user, for adhering or removing sealing film etc. and these parts can be designed freely for their respective purposes.

The front wall is preferably made from suitable inert plastic materials such as polyethylene or polypropylene, possibly with reinforcing fillings of e.g. glass fibres, and can be manufactured in various ways, e.g. the cavities with opening can be made by machining in a raw material blank but the structures described can easily be formed in one step, e.g. by pressing although preferably by injection molding since all structures, including the opening, can be obtained with a dividable molding tool. Although the front wall can be made of a laminate or other composite material a single material is generally sufficient.

As said the rear wall serves the purposes of sealing the rear part of the container before ejection of the liquid and allowing collapse of the cavity during ejection. The rear wall should run at least partially perpendicularly relative the opening axis, i.e. forming a non-zero angle therebetween and preferably runs substantially perpendicularly thereto. The requirements on

the rear wall material for sealing purposes depend on the particular application and liquid involved but generally it is desirable that the wall material is highly impermeable. It is also desirable to avoid solvents and other volatile components, both in the wall material and when attaching the rear wall to the front wall and preferably these parts are joined by heat sealing rather than by glue or adhesives. For the collapse purposes it is possible to have a rear wall material that breaks or ruptures when hit with the ram of the dispenser device, which, however, requires good sealing between ram and cavity. Hence it is preferred that the rear wall can be deformed without rupture, and most preferably be deformed to such an extent that it can fill out and conform to the inner surface of the cavity. The requirements for deformability can be reduced if the rear wall film is folded, e.g. in a continuous corrugated manner or in a discontinuous folded manner, i.e. in both cases with maintained single-curved shape, e.g. along single or multiple parallel lines over each container, to allow for unfolding as part of the deformation. In order to obtain a most controlled and reproducible collapse, however, it is preferred that no additional folds are used but that the rear wall when attached has substantially the same shape as the rear surface of the front wall. In any case the deformation during ejection will result in that the rear wall flat or single-curved shape is at least to some extent changed into a double-curved form, requiring some stretching of the material. The stretching and deformation can be elastic, as in a rubber sheet, e.g. if repeated use is intended, but is preferably at least partially and preferably substantially plastic in an irreversible manner, e.g. in order to avoid reuse of disposable containers or to prevent aspiration of air or liquid remains into the container after use. The rear wall preferably has the form of a sheet, film or foil of even thickness, which preferably is small compared to the front wall. The sheet may consist of a single material but preferably a composite material is used to meet all the requirements indicated. Most preferably the sheet is a laminate. Preferably the laminate comprises at least one impermeable and diffusion retarding layer, preferably a metal layer such as an aluminum layer, and at least one stretchable layer allowing deformation, preferably a plastic layer, e.g. of polyethylene, optionally also a heat sealable layer if the plastic layer does not have this property. In such a laminate it is acceptable that the metal layer breaks during wall collapse as long as remaining layers provide sufficient resilience for the deformation described.

As indicated it is preferred to temporary seal the container opening or openings before actual ejection of the liquid in order to maintain a fully sealed container. The seal should be

broken or removed immediately before use. Although a manually or pressure breakable rupturable seal can be used it is often preferred to use a removable seal in order to avoid any particle release from the seal, to have a fully foreseeable dynamic behavior and allow use of more reliable thick or strong layers. Generally a seal can be formed integral with the front wall, e.g. by molding so as to leave a membrane of material somewhere in the opening duct. Preferably, however, a separate peel layer is provided for removal prior to ejection, and preferably attached to the front surface of the front wall. Again it is preferred to avoid glue and adhesives and preferably some form of welding is used, as by ultrasonic or heat. In order to facilitate removal and interference with the opening area the sealing can be made to a limited area surrounding the opening. In multiple container structures it is preferred to make the layers individually removable for each container, e.g. by use of separate films, pre-cut films or separate tongues, e.g. in a star shape for a round disc. For the film material similar considerations apply as for the rear wall material, although the film need not be deformable by stretching and the demands on impermeability can be slightly reduced in view of the small opening area.

15       The parts described should be joined and liquid filled into the cavity to form a pre-filled sealed container, typically containing liquid for a single dose to be delivered. Although possible to fill the container cavity through the container opening, e.g. through a needle, the preferred way is to fill the cavity from the rear side of front wall before attachment of the rear wall. A useful procedure is then to adhere the sealing film over the opening or openings, possibly under welding action, filling liquid into the container cavity from the rear side and adhering the rear wall over the filled cavity, again possibly under welding action. Preferably these steps are made in the order mentioned. The invention contributes in several ways to the efficiency and simplicity of such a procedure, particularly in contrast to blister type manufacture and filling. In contrast to blister bulbs, flat sheets type materials can be used for the sealing film and the rear wall, allowing flat or single-curved adherence with equally simple flat or roll type tools and allowing adherence over several containers in multiple container structures and no stretch or other material deformation steps are necessary. Adapted welding action, e.g. heat, is applied individually to the sealing film and the rear wall respectively and directly to the adhering materials involved, whereas in blister manufacture sealing heat for front and rear materials has to be applied through a peel layer, over-adhering the peel layer, prolonging the process, possibly affecting the liquid present, and increasing product tolerances.

A delivery or dispenser device for ejection of the liquid from the containers can generally be said to comprise a housing with a seat for the container or container structure, a ram movable in relation to the housing in a direction substantially axial to the container when in the seat, an actuator arrangement operative to drive the ram.

5       The housing shall be understood in broad sense and may take a variety of forms. The device housing represents the point of reference for the container position and the movements described, such as the ram used for collapse of the container rear wall and for forces applied by actuating means performing said movements, whereat the force is applied between the housing and the moving part. The minimum functional requirement is that the housing offers  
10 a support or platform for the container and movable parts and the actuating means providing the movements and forces. As in common practice, however, it is preferred that the housing forms a container at least partly embracing the parts and preferably also to such an extent that only the features designed to be controlled or monitored by the operator are externally exposed, to give an overall convenient design to use.

15       The housing should contain a seat for a container or several containers, the minimum requirements on which is that at least the container to be emptied is kept fixed in relation to the ram, preferably so that the container axis and the movement axis for the ram are parallel and most preferably coaxial with respect to the ram part to hit the container rear wall. Preferably the seat should be able to accommodate containers with the characteristics described  
20 herein, e.g. with the shapes and sizes exemplified. The seat preferably supports the container against forward forces from the ram and preferably also against some rearward and lateral forces. The seat preferably allows the entire rear wall surface over the cavity to be exposed to the ram and should also expose at least the opening or openings on the front side of the container not to obstruct the liquid stream, although the rigidity of the present containers do not  
25 require any heavy support. Preferably the seat is also designed to allow easy exchange of discrete containers, or sequential movement of the individual containers of a multi-container structure, into the active position of the seat, e.g. by having a track in which the structure can be moved in one or two dimensions. In the preferred embodiment of containers placed in a circle, preferably on a disc shaped structure, it is suitable to rotate the disc around a central  
30 disc axis to bring the containers into alignment with the active position, in a revolver type manner. For single and in particular multiple container arrangements it is desirable that guid-

ing arrangements are provided to secure good alignment with the ram axis in order to reach high delivery precision intended, e.g. structures provided in connection with each container on the package for cooperation with at least one corresponding locking structure on the housing, seat or preferably ram, arranged for interlocking at proper alignment. Locking therebetween  
5 can with preference be associated with a signal to assist stop in correct position, e.g. tactile or audible signal in manual operation or a mechanical or electronically detectable signal in automatic operation. Additionally it is preferred to include a counting arrangement, again manual or automatic, mechanical or electronical, designed to keep track on the number of containers used or remaining and warning for or preventing reuse of already emptied contain-  
10 ers.

The ram may include a ram head and piston arrangement for moving the ram head along the movement axis. Although it is possible to design the ram head non-congruent with the container cavity, e.g. for use with different cavity shapes or when relying on rear wall stretch properties for emptying, it is preferred to design it for complete fill-out of the cavity.  
15 This can be done with a soft and adaptable ram head, e.g. for the purposes of being compatible with different cavity forms, to increase operation range or to obtain a certain emptying pattern, preferably to squeeze out the liquid from the peripheral cavity parts towards the central, axial, parts which can be done for example by making the soft ram head slightly shallower in shape than the shape of the cavity vessel form. For a single cavity form it is, how-  
20 ever, preferred to make the ram head front surface substantially identical with the inner cavity surface or, expressed in another way, the rear surface of the front wall in the container space. The ram head can be surrounded by a support, e.g. a tube structure in which the ram head travels, which is preferably also abutted around the cavity to seal the space between ram head and cavity at least during the rear wall collapse movement, e.g. to allow high pressures or re-  
25 duce leakage risks. The piston part of the ram is generally not critical to the dynamics of the ejection but rather for propulsion and will be described in connection with the actuator system.

The ram can be propelled by use of a variety of mechanisms and energy sources. The mechanism can be operated directly with manual energy, in which case, however, it is pre-  
30 ferred to provide an leverage or gear exchange to amplify or transform force or speed, preferably towards lower speed and higher force. In order to have controlled and consistent results

it is generally preferred to have automatic function in the sense that after operator triggering the propulsion takes place automatically, and preferably irreversibly, by use of stored energy. The energy may be stored in any way, e.g. in a mechanical spring, a gas spring or gas generator, as electrical energy or a combination thereof. The energy may be transmitted to the ram  
5 by suitable motor or transmission means, e.g. electric motor or solenoid type motor for electrical energy, a piston and cylinder arrangement for gas springs or gas generators and rotation axis or plunger for coiled and helical springs respectively. It is generally preferred to include a transmission between the motor means and the ram proper, among other to provide a force amplification, e.g. by use of a gear wheel or a cam surface type of transmission. It is preferred  
10 that at least the ram head, and preferably parts of the ram piston, are prevented from rotation during forward movement, which can be secured by any known guiding structures, such as a non rotation symmetric part cooperation with a complementary part, the parts being positioned on ram and housing respectively. A preferred transmission component for propulsion of the ram is a screw and nut arrangement, one of which is positioned on the ram and the other  
15 on the motor side of the transmission. The necessary speed, force and movement characteristics for the ram depends on a number of conditions, such as the nature of the container parts and opening, the particular application implementation, e.g. surface or penetrative delivery, the viscosity of the preparation, e.g. aqueous solutions or ointments, etc. and general statements cannot be given. However, the energy sources, motor means and transmissions exemplified can be adapted to each need. It has also been found beneficial to include a damper, e.g.  
20 a dash pot, a linear damper, a flow valve, a magnetic damper etc., to control speed with maintained stable force. In most applications it is desirable to have a rapid rise and fall of pressure, generally requiring a stable and non-retarded speed of the ram, which is facilitated e.g. by a damper or high inertia in ram and transmission.

25 It is also preferred to include in the device arrangements to facilitate breakage or removal of the temporary seal over the openings as described. Although it is possible to break a seal by the pressure itself generated when collapsing the rear wall it is preferred to use an active step to break the seal. This can be done by having a de-sealing tool arranged in connection with the housing, e.g. a penetrating tool for a rupturable sealing or a wedging or drawing  
30 arrangement for removal of peelable sealing films. Such arrangements can be located at or close to the seat, e.g. to allow late action, or remote, e.g. if the seat area is crowded. The de-

sealing tool can be operated manually or automatically or compulsory, e.g. as a part of the movement of container into the seat site. It has been found beneficial, however, to position the de-sealing tool on the rear side of the container for movement from rear to front, which allows the de-sealing tool to attack the film in the best manner possible, i.e. on the film rear side to lift it from the front wall front surface. It also allows the de-sealing tool and mechanism to be arranged more conveniently within the housing and to the rear of the container for less interference with the ejection area and ejection target. The tool can have a movement mechanism of its own but most preferably the tool is arranged on or in connection with the ram in such a manner that it moves together with the ram, utilizing the same movement mechanism and facilitating a removal immediately before ejection and as an unavoidable part of the ejection procedure. Preferably the de-sealing tool passes through an opening in the front wall structure, and possibly also through the rear wall, at a location not occupied by the container cavity but covered by the sealing film. With preference the dimensions of such an opening and the de-sealing tool can be mutually adapted so as to act as a guiding arrangement, as described, for final alignment of ram and cavity before activation. In operation the tool first lifts the film from the container opening and the ram head then hits the container rear wall. It is possible to perform these two steps in a single continuous movement for the ram, e.g. for simplest operation and latest possible de-sealing, or in a two-step operation, possibly requiring two triggering actions from the user, e.g. in order to enable the user to verify that the film has been properly removed. It might also be of interest to use different movements characteristics for the two steps, e.g. a slow movement for the peel not to cause tearing or rupture and a fast action for ejection, which might require some shift arrangement, e.g. a gear shift, de-coupling of brake or damper etc. The general container design principles of the present invention strongly amplifies the above described advantages, among other by having a rigidity permitting front wall use for guiding purposes and allowing areas outside the cavity part to be utilized without instability problems.

Depending on each application it may also be beneficial to equip the device with means assisting targeting and positioning. For example, when used for shooting liquid to the eye the device front with a cowl, eye piece or eye cup for abutment to the eye socket. Penetrating applications may require small distance or direct contact between opening and target surface whereas larger surface treatment may require an end piece defining both an an-



gle and a distance. As known per se for dispenser devices in general the device may also include mechanical or electronic warning, alerting or timing means.

As indicated in the introduction the invention described herein may be used for a variety of purposes within and beyond the medical area and for any type of preparations, such as chemicals, compositions or mixtures, in any container and delivered for any purpose. It may be used for liquids within a broad range of compositions, e.g. pure liquids, solutions, emulsions, dispersions, body fluids etc., and viscosities e.g. high viscosity ointments. For reasons outlined the system has certain special values in connection with medical delivery devices where also the design constraints are more severe than in most other applications. For convenience the invention has been described in terms of this application.

A preferred use of the invention is in connection with ophthalmic treatment of the eye with medical. The common administration manner is by eye drops or ointments, however, having several disadvantages. Both methods generally deliver a substantially higher amount than can be absorbed by the eye, not only resulting in dosing uncertainty and loss of expensive treatment medical but also in potential side-effects when non-absorbed preparation is drained away via the nasolacrimal duct, e.g. beta-blocking agents used in eye treatment has substantial systemic effects. Another problem is that the common administration methods tend to induce a blink reflex that may entirely destroy the treatment or at least introduce a high degree of uncertainty. Also the common methods do not provide an high degree of targeting precision, e.g. ability to hit the iris part of the eye being the penetrable part of the eye for prostaglandin. The principles used for the present invention solves these problems, among others by the possibility to deliver small amounts of liquid, actively ejected and not determined by liquid surface tension, by the possibility of deliver the liquid with sufficient speed to beat the blink reflex and by the possibility to eject a concentrated and coherent stream for precise targeting. Typical parameters for this application will be given below although the invention shall not be regarded as limited to any such exemplified parameter. A typical single dose volume for delivery to the eye can be less than 25 microliter, preferably less than 15 and most preferably less than 10 microliter. Generally the volume is at least 1, preferably at least 2 and most preferably at least 3 microliter. Since it is desirable that each container contains a single unit dose, these figures also relate to the liquid volume charged and contained in the containers, possibly allowing for some overfilling to compensate for non-

ejectable amounts, such as liquid remaining as wetting film or in the container opening duct, e.g. 25% but preferably no more than 10% overfilling. In addition to the liquid the container may contain other material, notably gas such as air or a purging gas such as nitrogen or noble gases, e.g. to facilitate manufacture, assist in atomizing or act as pressure buffer, although in many instances little or no gas need to be present. The container can for example have a maximum cavity diameter is about 1 to 20 mm, preferably between 2 and 10 mm, calculated as a circle equivalent surface if the cavity is not round. A suitable speed for the stream of drops or jet ejected should be a balance between on one hand enough linear momentum to traverse an air gap between opening and target, without gravity assistance, and to travel fast enough not be obstructed by blinking and on the other hand not so fast as to cause inconvenient sensible impact on the eye. The ideal speed is to some extent dependent on the drop size used but as a general rule the drops should be able to traverse at least 1 cm, preferably at least 3 and most preferably at least 5 cm through air by own momentum, incorporating reasonable distances between opening and target. A suitable lower speed limit when leaving the opening is 1, m/s, preferably at least 5 m/s and most preferably at least 10 m/s. Generally the speed is lower than 200 m/s and preferably lower than 100 m/s. A suitable drop size so defined should be sufficient not to be retarded too quickly and not to be easily redirected, e.g. to be inhaled, and preferably has a minimum diameter of 20 micron, preferably not less than 50 micron and most preferably at least 100 microns. Normally the size is less than 2000 micron and preferably less than 1500 micron. The stream may take the form of a shower or spray of atomized liquid droplets but preferably the stream is narrow and fairly coherent although even such a stream tend to break up into individual droplets after a certain time of distance. The above given values are intended to relate to spherical droplets and for multiple droplets to the weight average of particle diameters. A coherent stream tend to break up into droplets of a diameter of roughly double the diameter of the stream. Accordingly suitable opening diameters for the containers are about half the above given drop diameters or roughly between 10 and 1000 microns, preferably between 20 and 800 microns. A suitable front wall thickness, from front of opening to rear wall, may range from 0,5 mm to 10 mm and preferably between 1 and 5 mm. The above considerations are fairly independent of liquid viscosity and tend to apply both for solutions and ointments.

#### Summary of drawings

Figures 1A to 1G illustrates schematically in section various container designs and features useful in single or multiple container arrangements

Figure 2A, 2B and 2C show in rear flat view, diametrical section and enlarged detail a multiple container structure in disc form, having 14 containers distributed around the disc  
5 periphery.

Figure 3A to 3D depicts a similar disc as in Figure 2 in perspective views and partial sections, showing also rear wall and peel film.

Figure 4A and 4B shows in partial section and perspective view respectively the internal parts of a dispenser device for disc type multiple containers.

#### 10 Description of drawings

In Figure 1 all embodiments, except that depicted in figure 1F, the front wall is formed from a plate type structure, being either flat as in Figures 1A, 1B, 1D and 1E or curved with concentric surfaces as in Figures 1C and 1G. The Figures illustrates various useful features but, for clarity, not all necessary or preferred details are shown in all Figures.

15 In Figure 1A the container 110 comprises the front wall 111, having a front surface and a rear surface being substantially parallel. The front wall 111 has a cavity 112 in the form of a vessel with an front vessel surface 113 and an opposite rear opening 114. The cavity cross-section shown has the general form of a circle segment. An opening 115, defining a container axis 116, provides a fluid connection between the cavity interior and the exterior at  
20 the front wall front side. The opening 115 is here shown as a substantially constant cross-section channel with a thin inner membrane 117, formed from material left at injection molding and acting as a temporary seal to be broken at cavity pressurization. A deformable rear wall 118 covers the rear opening 114 of the cavity vessel with a seal (not shown). The rear wall is formed from an originally flat sheet material, here shown with discontinuous curvature  
25 in the form of a number of folds 119, running perpendicular to the Figure plane, the folds acting to reduce the necessary stretching of the rear wall material when forced into the container cavity.

Figure 1B shows a container 120 similarly designed as in Figure 1A except that the opening 125 is shown slightly convergent and is covered on the front wall front surface by a  
30 temporary seal in the form of a rupturable or peelable sheet 127, sealed to the front surface of the front wall. The rear wall 128 is here shown as a film with a continuous curvature part 129,

providing an additional volume over that provided by the vessel when limited by the rear vessel opening 124, here illustrated with a dotted line flush with front wall rear surface, and also adding surface to the rear wall limiting stretching thereof. The curvature of rear wall part 129 can be formed from a flat sheet material if the curvature is constant normal to the Figure  
5 plane, as for a cylinder mantle surface, but need a double-curved material if in the form of a bulb.

Figure 1C illustrates a container 130 formed in a front wall 131 basically in the form of a cylinder part with single-curved front and rear surfaces centered around a cylinder axis 133 and with an opening 135 on the cylinder exterior, convex, surface. Also illustrated is a  
10 cavity 132, having a cylindrical part 134 terminating in a sphere segment part 137, both parts symmetrically centered around opening 135 axis 136. Rear wall 138 is formed from a single-curved material continuously curved to adapt to the cylindrical inner surface of the front wall 131, hereby being larger in surface than a corresponding flat sheet over the cavity vessel opening, illustrated by dotted line 139.

15 Figure 1D illustrates a container 140 with a front wall 141 having a cavity 142 the vessel surface of which has a cylindrical part 143 and a flat bottom part 144. Also illustrated is an opening 145 with a surrounding recess 146 on the front wall front surface, serving to avoid direct contact between the opening proper and a peel film 147 and its sealing surface 148, which is arranged in a ring outside the recess 146.

20 Figure 1E schematically illustrates a container 150 with a cavity in the form of a circle segment, as in Figures 1A and 1B, centered around circle midpoint 153. Construction radii lines 154 drawn from point 153 intersects the inner surface 155 of the cavity 152 vessel perpendicularly and the Figure illustrates that the wall thickness, when measured along these construction lines normal to the vessel surface, increases (solid parts of lines 154) when

25 moving laterally away from the cavity axis 156. In contrast, Figure 1F illustrates a container 160 embodiment wherein the cavity 162 is formed in a front wall 161 design giving a constant wall thickness when measures along construction lines 164 centered in point 163 in the same manner as in Figure 1E. This Figure also illustrates a longer opening 165 duct, having a convergent part 166 and a straight part 167 with roughly constant cross-section. For clarity, sectioning lines have been omitted in these Figures.  
30

Figure 1G illustrates a container 170 formed in a front wall 171 basically in the form of a cylinder part, as in Figure 1C, with single-curved front and rear surfaces centered around a cylinder axis 173. However, in this embodiment the opening 175 is arranged on the cylinder interior, concave, surface. Rear wall 178 is formed from a single-curved material continuously curved to adapt to the cylindrical outer surface of the front wall 171, hereby again being larger in surface than a corresponding flat sheet over the cavity 172 vessel. Also a temporary seal film 177, covering the opening 175, is formed from a single-curved sheet material.

All container embodiments illustrated in Figure 1A to 1G can be used as single discrete containers or can be part of multiple container structures by being joined with similar or different container types, indicated by undefined lateral continuations of the front walls illustrated.

Figure 2A, 2B and 2C show in rear flat view, diametrical section and enlarged detail a multiple container front wall structure in disc form, having 14 containers distributed around the disc periphery. The disc, generally designated 200, can be said to include a peripheral front wall structure 210 with the containers, a slightly offset central auxiliary part 230 with actuating and holding arrangements and a transition part 250 with peeling and guiding arrangements. In the embodiment shown the plate like basic shape of the front wall structure 210 has a front side 211 and a rear side 212 and comprises 14 identical cavities 220 in the general form of circle segments, the rear rim 221 of which are slightly rounded. The cavity openings 222 are slightly convergent and on the front side 211 of the front wall structure 210 a small recess 223 is provided for reasons earlier outlined. The auxiliary part 230 can be said to include a central axis hole 231 for bearing and actuation purposes with a keying surface 232 providing non-rotational symmetry to facilitate actuation. The hole 231 preferably is slightly conical and converging from rear to front in order to facilitate actuator insertion and centering. Spacing ridges 233 serve to provide a gap between discs when stacked, e.g. in sterilization. The transition part 250 can be said to include bores 251, also slightly converging towards the front, serving to allow penetration of a de-sealing tool from the rear side towards the front side to lift off a temporary seal in the form of a peel film (not shown), the cooperation between the tool and the bore also acting as a guiding arrangement, centering the cavity with respect to a ram head of a dispenser device. With the cavity arrangement shown a flat rear wall film (not shown) can be positioned over the cavity rear sides to seal the containers,

e.g. after filling. Each cavity can be sealed with individual film parts but it is also possible to use a single sheet for covering all cavities. Preferably such films are radially restricted to the front wall part 210 of the disc, leaving the transition part 250 and the auxiliary part 230 uncovered. A typical overall thickness of the front wall plate can be about 2 mm with a cavity  
5 depth of about 1.5 mm.


Figure 3A to 3D shows a similar disc arrangement as in Figure 2. Figure 3A is a perspective view of the disc front side, Figure 3B a perspective view of the rear side, Figure 3C a section from disc periphery to center through a cavity before ejection and Figure 3D a similar section of the cavity after use. As in Figure 2 the disc has a peripheral front wall structure 310  
10 with the containers, a slightly laterally offset central auxiliary part 330 with actuating and holding arrangements and a transition part 350 with peeling and guiding arrangements. All details common with Figure 2 will not be repeated. Also in this embodiment there are 14 identical cavities 320 in the general form of circle segments with cavity openings 322 with a front side recess 323. Holes 311 serves to facilitate handling of the disc, e.g. during manufacture and filling. The auxiliary part 330 here has a central axis hole 331 for bearing and actua-  
15 tion purposes with 14 symmetrically arranged teeth 332, allowing the disc to be attached to an correspondingly toothed actuating axis of a dispenser device without consideration to the positioning of any individual container or disc part. The transition part 350 has bores 351, serving to allow penetration of a de-sealing tool from the rear side towards the front side to lift off  
20 a temporary seal in the form of a peel film to be described. A single flat rear wall film 370, cut into ring form, radially restricted to the front wall structure 310, covers all the cavity rear sides to seal the containers. As best seen in Figure 3A a peelable film 390 is attached to the disc front side so as to cover all cavity openings 322. The peel film is formed in star form from a single flat sheet and comprises a unifying central ring part 391, concentric attached to  
25 the auxiliary disc part 330, from which ring part tongues 392 radiate, one for each cavity, so as to pass over the transition part 350 under covering of the bores 351 and further radially out to cover the cavity openings 322. Initially all cavity openings 322 are covered by the tongues 392. When the liquid from one of the container is to be dispensed a de-sealing tool (not shown) is moved through the corresponding bore 351 from the disc rear side towards the front  
30 side, hereby lifting the corresponding tongue 392' to free and expose the corresponding cavity opening 322, as best seen in Figure 3A and 3D. The container content is then ejected by forc-

ing the rear wall 370 under stretching from the flat condition shown in Figure 3C to the cavity filling condition shown in Figure 3D.

Figure 4A and 4B illustrates a dispenser device for multiple container discs as described in relation to Figure 3. The device, generally designated 400, is shown without any casing part of the housing. The device receives the disc 410 at its front side, to the right in the drawings. The device can be said to include a seat 420 for the disc incorporating a disc bearing axis 421, having teeth 422 corresponding to the teeth of disc central opening. The axis 421 has a bearing gear wheel 423 cooperating with a control gear wheel 424 connected to a thumb wheel 425 for sequential advancement of the individual containers into the ejection position to be described. The thumb wheel can be actuated manually or a may be connected to a mechanism (not shown) for automatic incrementation in connection with the motor actuation cycle. A pawl and ratchet mechanism 426 secures that the disc occupies predetermined positions only and that it can be rotated in one direction only to avoid reuse of already emptied containers. These parts may also include counting means or other assistance (not shown) to urge for disc replacement. In the Figures the lowermost disc part is in the active ejection position 427 where the seat may comprise additional support or guidance (not shown) for the disc, e.g. to against forward and possibly rearward movement for example to balance force from the ram. Preferably such support structures can be arranged on a door arrangement of the housing for inserting the disc. In this position the cavity is centered with respect to the ram, generally designated 430. The ram includes a ram head 431 with a circle segment front form, adapted to the container cavity form. The ram head is part of a ram head support 432, also carrying a de-sealing and guiding tool in the form of a probe pin 433, arranged to penetrate bores, corresponding to the bores 351 in Figure 3, in the disc 410 for the described purpose of lifting a temporary seal film from the container opening and of centering and stabilizing the container cavity with respect to the ram head 431. Probe pin 433 extends farther in the forward direction than ram head 431 in order to perform the above functions before the ram head hits the rear wall of the container. The ram further comprises an external screw-thread 434 for propelling the ram axially forwards and rearwards. The ram is keyed against rotational movements by guidance (not shown) of the ram head support 432 flat lower surface 435. The device further comprises a motor and transmission system, generally designated 450 for actuation of the ram movements. A rotationally arranged but axially stationary drive nut 451 has an internal screw-

thread 452 for cooperation with ram external screw-thread 434 so as to move the ram axially at rotation of the drive nut. An angular viscous damper 453 has a stationary part 454 and a rotational part 455, connected to the drive nut 451 so as to rotate with the drive nut. The drive nut 451 has external gear teeth 456 by which the drive nut can be rotated. A rotationally ar-  
5 ranged motor housing 460 has an external gear 461 of larger diameter than the drive nut 456. Inside motor housing 460 is arranged a motor spring 462, which can be cocked by rotation via a winding axis (not shown) entering through the open part 463, to the left in the drawings, of the motor housing 460. Rigidly attached to the motor housing 460 and concentric therewith is a catch wheel 464 with a rim groove 465 for cooperation with an arming pin 466 of a manu-  
10 ally accessible safety switch 467. A fire system 470 incorporates a release system (not shown) with a fire button 471 having two activation positions, a first partial operation of the fire button allowing the motor and transmission system 450 to advance the ram to move the probe pin 433 into to completed removal of the temporary seal film, but with no contact between container rear wall and ram head 431, and a second operation of the fire button 471 allowing the  
15 ram head 431 to complete its forward movement into the container cavity, as shown in the Figure. A typical propulsion speed for the ram during ejection can be for example about 2 mm movement performed during a time of about 50 msec, for a cavity depth of about 1.5 mm.

The invention is not limited to the embodiments described and exemplified but can be varied within the terms of the appended patent claims.





Claims

1. Pressurisable container for storing and ejecting liquid, the container comprising a) a front wall having or surrounding a cavity corresponding to the form of an open vessel, b) an opening in the front wall adapted for ejection of the liquid from the container, said opening  
5 defining a container axis, c) optionally a sealing over the opening adapted for temporary use, and d) a rear wall closing and sealing the open part of the front wall vessel to confine a space for the liquid in the container, the rear wall running at least partially perpendicular to the container axis and being displaceable or deformable for movement towards the opening to pressurize the container liquid, c h a r a c t e r i z e d i n the improvement comprising,  
10 that the front wall is substantially rigid in relation to the rear wall,  
that the rear wall before pressurizing the container is substantially flat or substantially single-curved and  
that the rear wall is deformable under stretching to substantially fill out the container cavity.
- 15 2. The container of claim 1, c h a r a c t e r i z e d i n that the cavity has the form of a generally concave deepening when seen from the rear wall side.
3. The container of claim 1, c h a r a c t e r i z e d i n that the cavity has little, and preferably no, undercut parts when seen from the rear side.
4. The container of claim 1, c h a r a c t e r i z e d i n that the front wall has a roughly  
20 constant thickness when measured normal to the cavity surface towards the front wall.
5. The container of claim 1, c h a r a c t e r i z e d i n that the front wall has thickness, as measured normal to the cavity surface towards the front wall, increasing when moving away from the axis.
6. The container of claim 1, c h a r a c t e r i z e d i n that the front surface of the front  
25 wall is substantially flat or substantially single-curved, at least in the area around the opening.
7. The container of claim 1, c h a r a c t e r i z e d i n that the rear surface of the front wall is substantially flat or substantially single-curved, at least in the area around the cavity.
8. The container of claim 1, c h a r a c t e r i z e d i n that the front and rear surfaces  
of the front wall in the neighborhood of the cavity, but disregarding cavity and opening as  
30 such, are substantially parallel or concentric.

9. The container of claim 8, characterized in that the front wall has the overall shape of a plate or cylinder part.

10. The container of claim 1, characterized in that the opening duct has a cross-section which is one of roughly constant, roughly converging, roughly diverging or a  
5 combination thereof.

11. The container of claim 1, characterized in that the opening is designed to assist in atomizing the liquid.

12. The container of claim 1, characterized in that the opening is designed to assist in forming a coherent linear liquid stream.

10 13. The container of claim 1, characterized in that the front wall front side has a cut-out area around the opening.

14. The container of claim 1, characterized in that the container is connected to at least one other container to form a multiple container unit.

15 15. The container of claim 14, characterized in that the front wall surface of several containers lies in the same flat or single-curved plane.

16. The container of claim 15, characterized in that the front wall surfaces of several containers are covered by a single sheet material.

17. The container of claim 14, characterized in that the rear wall surface of several containers lies in the same flat or single-curved plane.

20 18. The container of claim 17, characterized in that the rear wall surfaces of several containers are covered by a single sheet material.

19. The container of claim 14, characterized in that the unit is a substantially rigid and self-bearing structure.

25 20. The container of claim 19, characterized in that that the unit comprises an enlarged front wall structure in which several cavities with openings are provided to form the multiple containers.

21. The container of claim 20, characterized in that the front and rear surfaces of the front wall structure are substantially parallel in the neighborhood of the cavities, when disregarding the cavities and openings as such, to give a general plate form.

30 22. The container of claim 21, characterized in that the front wall structure has the overall shape of a disc.

23. The container of claim 22, characterized in that the several containers are positioned along at least one circle concentric with the disc periphery.

24. The container of claim 20, characterized in that the front and rear surfaces of the front wall structure are substantially single-curved and concentric in the neighborhood of the cavities, when disregarding the cavities and openings as such.

25. The container of claim 24, characterized in that the front wall structure has the overall shape of a full or partial cylinder.

26. The container of claim 25, characterized in that the several containers are positioned over two dimensions of the cylinder surface.

10 27. The container of claim 1, characterized in that the rear wall is folded in a continuous or discontinuous manner.

28. The container of claim 1, characterized in that the rear wall has substantially the same overall shape as the rear surface of the front wall.

29. The container of claim 1, characterized in that the rear wall is designed to  
15 be deformed elastically.

30. The container of claim 1, characterized in that the rear wall is designed to be deformed inelastically or permanently.

31. The container of claim 1, characterized in that the rear wall comprises a laminate.

20 32. The container of claim 1, characterized in that the rear wall comprises a metal layer.

33. The container of claim 1, characterized in that a temporary sealing is provided over the opening.

34. The container of claim 33, characterized in that the sealing is rupturable  
25 or removable.

35. The container of claim 33, characterized in that the sealing comprises a flat or single-curved sheet.

36. The container of claim 1, characterized in that the liquid volume is less than 25 microliter, preferably less than 15 and most preferably less than 10 microliter.

30 37. The container of claim 1, characterized in that the opening diameter is between 10 and 1000 micron, preferably between 20 and 800 micron.

38. The container of claim 1, characterized in that the front wall thickness is between 0,5 and 10 mm, preferably between 1 and 5 mm.

39. The container of claim 1, characterized in that the maximum cavity diameter is about 1 to 20 mm, preferably between 2 and 10 mm.

5        40. Pressurisable container for storing and ejecting liquid, the container comprising a) a front wall having or surrounding a cavity corresponding to the form of an open vessel, b) an opening in the front wall adapted for ejection of the liquid from the container, said opening defining a container axis, c) optionally a sealing over the opening adapted for temporary use, and d) a rear wall closing and sealing the open part of the front wall vessel to confine a space  
10 for the liquid in the container, the rear wall running at least partially perpendicular to the container axis and being displaceable or deformable for movement towards the opening to pressurize the container liquid, characterized in the improvement comprising,

that in the vicinity of the cavity the front wall has the overall shape, except for the cavity itself, of a flat or single-curved plate with substantially parallel or concentric front and  
15 rear surfaces,

that at least a part of the cavity is formed between the front and rear surfaces with the opening exposed on the front surface and the open part of the vessel exposed on the rear surface, and

that the rear wall being attached to the rear surface.

20        41. The container of claim 40, characterized in any characteristic of claims 1 to 39.

42. Pressurisable container for storing and ejecting liquid, the container comprising a) a front wall having or surrounding a cavity corresponding to the form of an open vessel, b) an opening in the front wall adapted for ejection of the liquid from the container, said opening  
25 defining a container axis, c) optionally a sealing over the opening adapted for temporary use, and d) a rear wall closing and sealing the open part of the front wall vessel to confine a space for the liquid in the container, the rear wall running at least partially perpendicular to the container axis and being displaceable or deformable for movement towards the opening to pressurize the container liquid, characterized in the improvement comprising,

30        that the front wall thickness, as measured along lines running through the cavity and normal to the vessel closed surface, increases when moving off-set from the container axis.

43. The container of claim 42, characterized in any characteristic of claims 1 to 39.

44. A method for manufacture of a container containing liquid, the container comprising a) a front wall having or surrounding a cavity corresponding to the form of an open vessel, b) an opening in the front wall adapted for ejection of the liquid from the container, said opening defining a container axis, c) optionally a sealing over the opening adapted for temporary use, and d) a rear wall closing and sealing the open part of the front wall vessel to confine a space for the liquid in the container, the rear wall running at least partially perpendicular to the container axis and being displaceable or deformable for movement towards the opening to pressurize the container liquid, characterized in the steps of,

forming a front wall with a cavity in the form of a vessel with an opening connecting the vessel with the front wall front surface,

introducing liquid into the vessel cavity, and

attaching and adhering a flat or single-curved rear wall film to the vessel cavity open part to enclose the liquid in the container.

45. The method of claim 44, characterized in the step of forming the front wall with cavity and opening by injection molding.

46. The method of claim 44, characterized in the step of adhering the rear wall film by welding.

47. The method of claim 46, characterized in the step of welding by heat.

48. The method of claim 44, characterized in the step of adhering a flat or single-curved sealing film over the opening.

49. The method of claim 44, characterized in the step of forming a front wall with more than one cavity.

50. The method of claim 49, characterized in the step of adhering the rear wall film over more than one cavity.

51. The method of claim 49, characterized in the step of adhering a flat or single-curved film over more than one cavity.

52. The method of claim 44, characterized in that the container has any of the characteristics of claims 1 to 39.

53. A container containing liquid, characterized in that it is manufactured according to the method of any of claims 44 to 53.

54. A method for ejecting liquid from a container, the container comprising a) a front wall having or surrounding a cavity corresponding to the form of an open vessel, b) an opening in the front wall adapted for ejection of the liquid from the container, said opening defining a container axis, c) optionally a sealing over the opening adapted for temporary use, and d) a rear wall closing and sealing the open part of the front wall vessel to confine a space for the liquid in the container, the rear wall running at least partially perpendicular to the container axis and being displaceable or deformable for movement towards the opening to pressurize the container liquid, characterized in the steps of,

pressurizing the container by moving the rear wall at least partially in the axial direction and towards the opening with sufficient speed to eject liquid through the opening and hereunder stretching the rear wall, elastically or inelastically, to increase its surface.

55. The method of claim 54, characterized in that the stretching step comprises the step of stretching the rear wall from a flat or single-curved form into a double-curved form.

56. The method of claim 54, characterized in that the stretching step comprises the step of deforming the rear wall until substantially corresponding to the cavity form.

57. The method of claim 54, characterized in the step of substantially evacuating the liquid of the container.

58. The method of claim 54, characterized in that the liquid is ejected from the opening with a speed of at least 5, preferably at least 10 m/s.

59. The method of claim 54, characterized in that the liquid is ejected in the form of droplets of a diameter less than about 20 micron.

60. The method of claim 54, characterized in that the liquid is ejected in the form of a coherent jet.

61. The method of claim 54, characterized in that the liquid is allowed to pass through air a distance not less than 1 cm before hitting a target surface.

62. The method of claim 54, characterized in that the liquid is allowed to hit an eye.

63. The method of claim 54, characterized in that the liquid is allowed to hit a soft surface for at least partial penetration thereof.

64. A device for ejecting liquid from a container, the container comprising a) a front wall having or surrounding a cavity corresponding to the form of an open vessel, b) an opening in the front wall adapted for ejection of the liquid from the container, said opening defining a container axis, c) optionally a sealing over the opening adapted for temporary use, and d) a rear wall closing and sealing the open part of the front wall vessel to confine a space for the liquid in the container, the rear wall running at least partially perpendicular to the container axis and being displaceable or deformable for movement towards the opening to pressurize the container liquid, characterized in the improvement comprising,

a housing with a seat for the container adapted to receive a container having a distance between rear wall and front wall front surface of at least 0,5 mm,

a ram arranged in a moving direction, in relation to the housing, substantially axial to the container when in the seat,

an actuator operative to drive the ram.

65. The device of claim 64, characterized in that the container when in the seat exposes substantially the whole part of the rear wall surface covering the cavity towards the ram.

66. The device of claim 64, characterized in that the seat is arranged to allow exchange of containers in the seat.

67. The device of claim 66, characterized in that the seat is arranged to allow exchange by sequential feeding of containers in a multiple container unit into the seat.

68. The device of claim 67, characterized in that the seat comprises a track in which the containers can be fed.

69. The device of claim 67, characterized in that the seat allows sequential feeding by rotation of a multiple container unit having containers arranged in a circle pattern.

70. The device of claim 64, characterized in a guiding arrangement arranged to secure alignment between the ram and the container cavity.

71. The device of claim 70, characterized in that the guiding arrangement comprises a releasable lock between the container and the housing or seat.

72. The device of claim 70, characterized in that the guiding arrangement comprises a releasable lock between the container and the ram.

73. The device of claim 72, characterized in that the locking arrangement comprises a structure locking the container when moved in the moving direction of the ram.

5 74. The device of claim 64, characterized in that the ram comprises a ram head and a ram piston.

75. The device of claim 74, characterized in that the front part of the ram head substantially conforms with the container cavity.

10 76. The device of claim 74, characterized in that at least the ram head front part is made of a soft material adaptable to the container cavity.

77. The device of claim 74, characterized in that the actuator is arranged to displace the ram piston.

78. The device of claim 64, characterized in that the actuator comprises an electrical arrangement for driving the ram.

15 79. The device of claim 64, characterized in that the actuator comprises a mechanical arrangement for driving the ram.

80. The device of claim 79, characterized in that the mechanical arrangement comprises at least one spring for energy storage.

20 81. The device of claim 64, characterized in that the actuator comprises a transmission including at least one driving force transforming arrangement.

82. The device of claim 81, characterized in that the transmission includes a screw and nut arrangement.

83. The device of claim 64, characterized in a damper arranged to affect the ram movement.

25 84. The device of claim 64, characterized in a de-sealing tool arranged for breakage or removal of a sealing over the container opening.

85. The device of claim 84, characterized in that the tool is arranged to the rear of the container when in the seat and arranged for forward movement during de-sealing.

30 86. The device of claim 85, characterized in that the tool is arranged to pass through or past the front wall during its forward movement to attack the sealing.



87. The device of claim 86, characterized in that the tool and container are arranged to cooperate as a guiding arrangement arranged to secure alignment between the ram and the container cavity.

88. The device of claim 85, characterized in that the tool is connected to the  
5 ram for common movement therewith.

89. The device of claim 88, characterized in that the tool is connected to the ram so as to hit the sealing before the ram hits the container.

90. The device of claim 64, characterized in that the container is any of the containers of claims 1 to 39.

10 91. The device of claim 64, characterized in arranged to enable ejection of liquid in accordance with any of claims 54 to 63.

92. A kit or combination characterized in that it comprises a) a container according to any of claims 1 to 39 and b) a device having a ram arranged to displace or deform the container rear wall to pressurize the container liquid.

11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000

Abstract

Pressurisable container for storing and ejecting liquid, the container comprising a) a front wall having or surrounding a cavity corresponding to the form of an open vessel, b) an opening in the front wall adapted for ejection of the liquid from the container, said opening

5 defining a container axis, c) optionally a sealing over the opening adapted for temporary use, and d) a rear wall closing and sealing the open part of the front wall vessel to confine a space for the liquid in the container, the rear wall running at least partially perpendicular to the container axis and being displaceable or deformable for movement towards the opening to pressurize the container liquid. The front wall is substantially rigid in relation to the rear wall, the

10 rear wall before pressurizing the container is substantially flat or substantially single-curved and the rear wall is deformable under stretching to substantially fill out the container cavity. The invention also relates to methods for container manufacture and devices and methods for ejecting liquid from the containers.

11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192

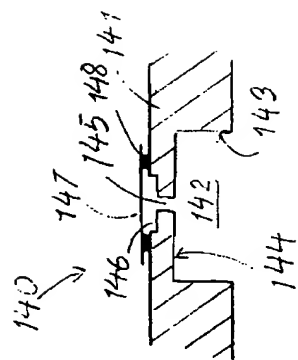


Fig. 10

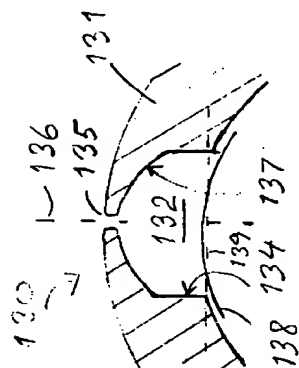


Fig. 1C

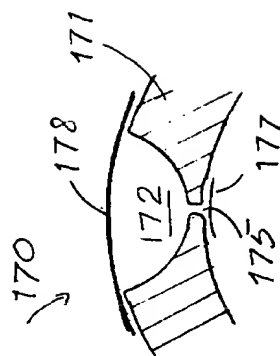


Fig. 16




Fig. 1B




Fig. 1F

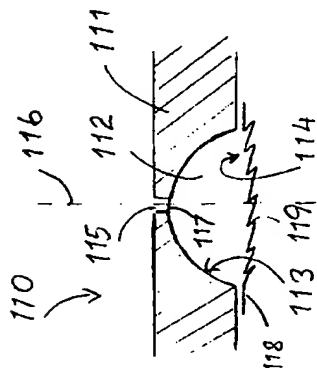



Fig. 1A

Fig. 1E

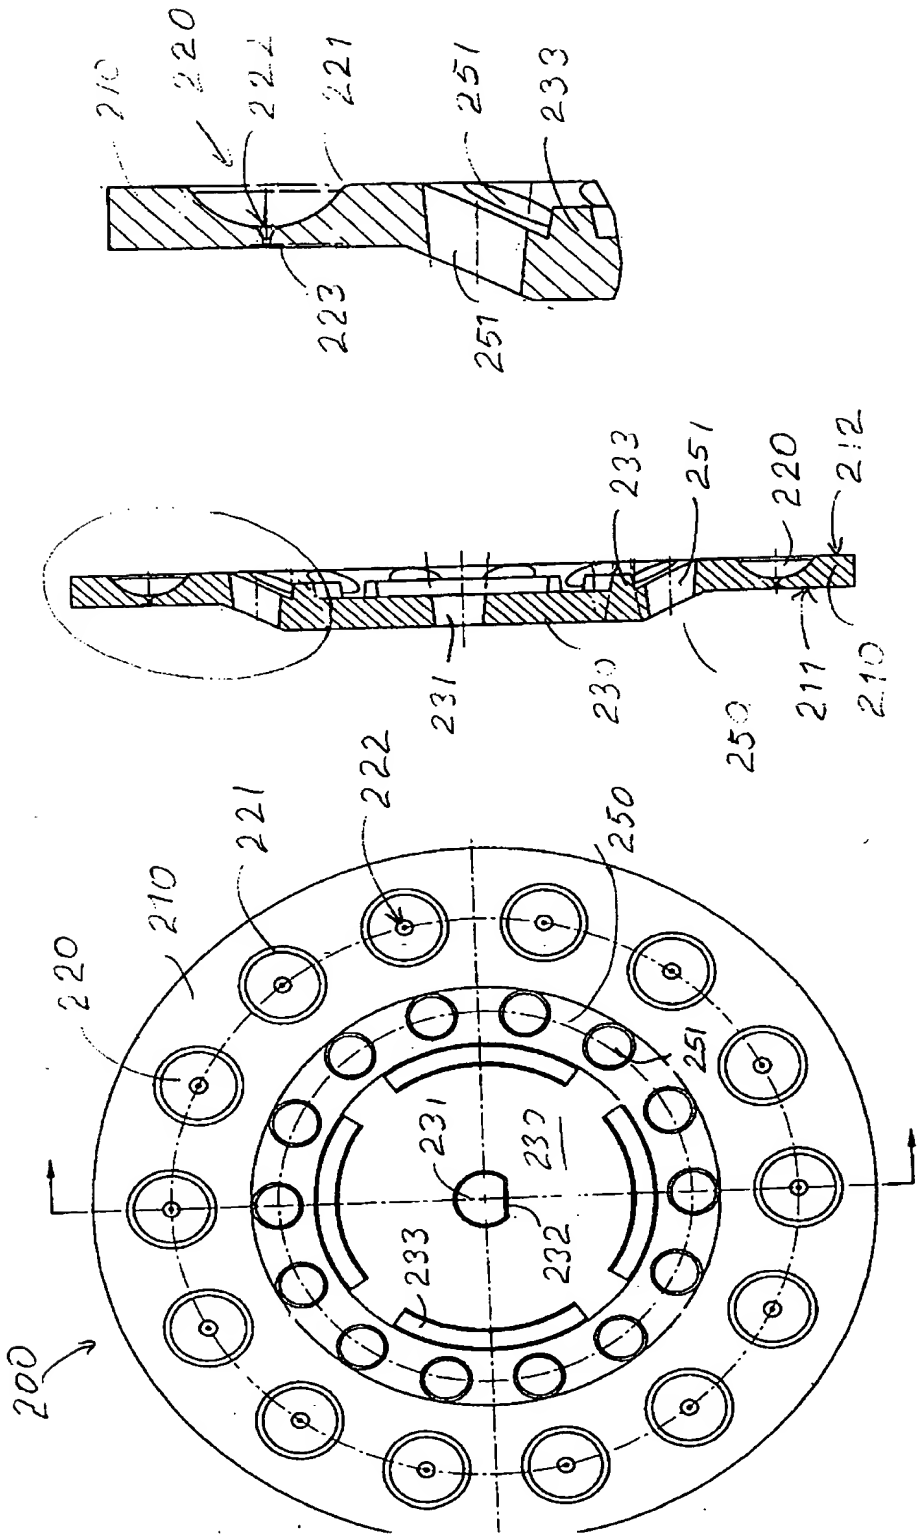


Fig. 2A

Fig. 2B

Fig. 2C

3/4

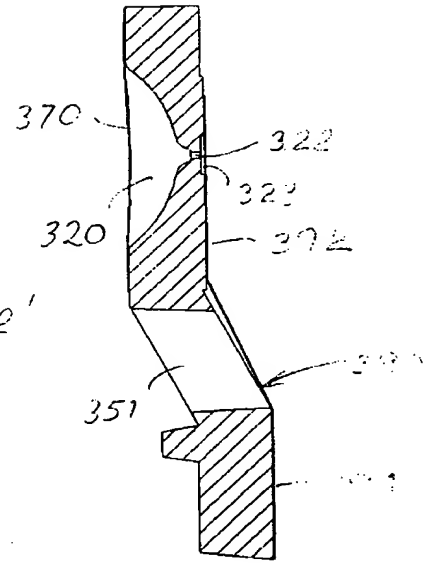
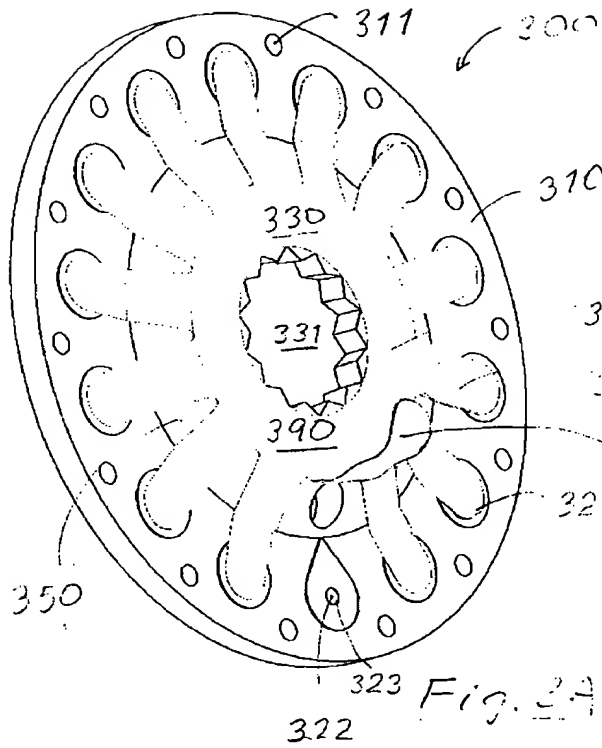


Fig. 3C

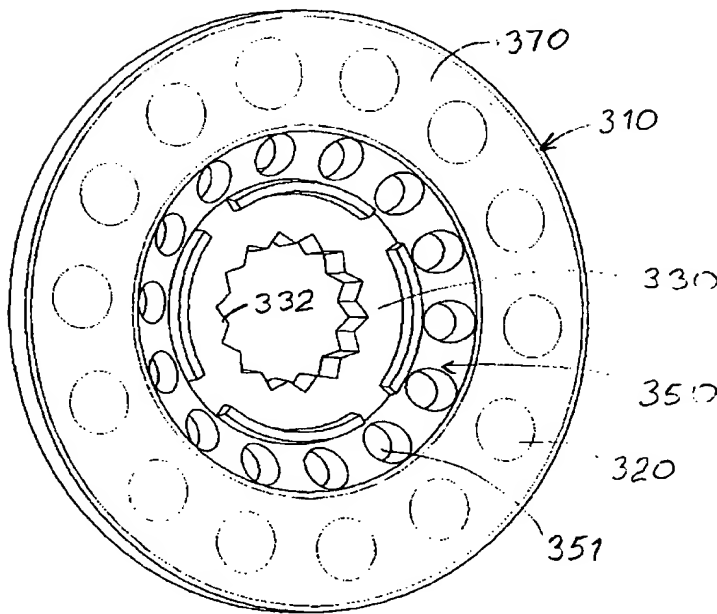


Fig. 2B

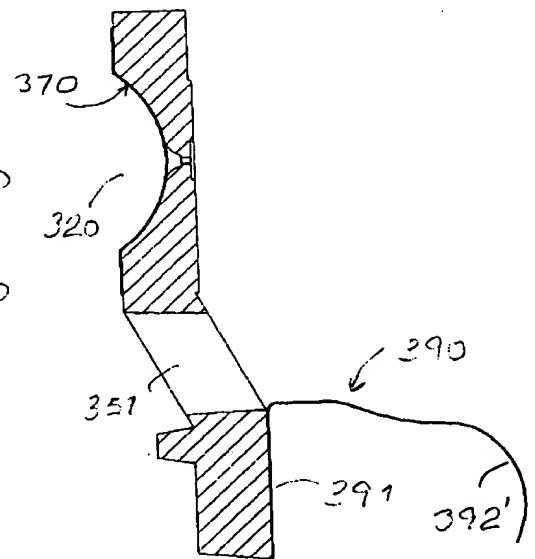


Fig. 3E

